



POSTAL BOOK PACKAGE 2025

CIVIL ENGINEERING

.....

CONVENTIONAL Practice Sets

CONTENTS

FLUID MECHANICS

1. Fluid Properties.....	2
2. Fluid Pressure and its Measurement	10
3. Hydrostatic Forces.....	15
4. Buoyancy and Flotation.....	29
5. Liquids in Rigid Motion.....	39
6. Fluid Kinematics.....	48
7. Fluid Dynamics.....	59
8. Flow Measurement	74
9. Flow Through Pipes	83
10. Boundary Layer Theory.....	105
11. Laminar Flow	116
12. Turbulent Flow.....	128
13. Drag and Lift.....	135
14. Dimensional Analysis	142
15. Open Channel Flow	152
16. Impulse of Jets	175
17. Hydraulic Turbine	182
18. Centrifugal Pump	201
19. Reciprocating Pump.....	214

Fluid Properties

Q1 The space between two square flat parallel plates is filled with oil. Each side of the plate is 60 cm. The thickness of the oil film is 12.5 mm. The upper plate, which moves at 2.5 metre per sec requires a forces of 98.1 N to maintain the speed. Determine:

- (i) the dynamic viscosity of the oil in poise, and
 (ii) the kinematic viscosity of the oil in stoke if the specific gravity of the oil is 0.95.

Solution:

Given: Each side of a square plate = 60 cm = 0.60 m

∴ Area, $A = 0.6 \times 0.6 = 0.36 \text{ m}^2$

Thickness of oil film, $dy = 12.5 \text{ mm} = 12.5 \times 10^{-3} \text{ m}$

Velocity of upper plate, $u = 2.5 \text{ m/sec}$

∴ Change of velocity between plates,

$$du = 2.5 \text{ m/sec}$$

Force required on upper plate, $F = 98.1 \text{ N}$

∴ Shear stress,
$$\tau = \frac{\text{Force}}{\text{Area}} = \frac{F}{A}$$

$$= \frac{98.1 \text{ N}}{0.36 \text{ m}^2} = 27.25 \text{ N/m}^2$$

(i) Let μ = Dynamic viscosity of oil

$$\tau = \mu \frac{du}{dy}$$

or
$$27.25 = \mu \times \frac{2.5}{12.5 \times 10^{-3}}$$

∴
$$\mu = 27.25 \times \frac{12.5 \times 10^{-3}}{2.5} = 1.3635 \text{ Ns/m}^2 \quad (\because 1 \text{ Ns/m}^2 = 10 \text{ poise})$$

$$= 1.3635 \times 10 = 13.635 \text{ Poise}$$

(ii) Specific gravity of oil, $S = 0.95$

Let ν = kinematic viscosity of oil

Mass density of oil, $\rho = S \times 1000 = 0.95 \times 1000 = 950 \text{ kg/m}^3$

Using the relation, $\nu = \frac{\mu}{\rho}$

We get,
$$\nu = \frac{1.3635 \text{ Ns/m}^2}{950 \text{ kg/m}^3} = 0.001435 \text{ m}^2/\text{sec}$$


$$= 0.001435 \times 10^4 \text{ cm}^2/\text{s}$$

$$= 14.35 \text{ stokes}$$

Q2 Calculate the dynamic viscosity of an oil, which is used for lubrication between a square plate of size 0.8 m × 0.8 m and an inclined plane with angle of inclination 30° as shown in figure. The weight of the square plate is 300 N and it slides down the inclined plane with a uniform velocity of 0.3 m/s. The thickness of oil film is 1.5 mm.

Solution:

Given: Area of plate, $A = 0.8 \times 0.8 = 0.64 \text{ m}^2$
 Angle of plane, $\theta = 30^\circ$
 Weight of plate, $W = 300 \text{ N}$
 Velocity of plate, $u = 0.3 \text{ m/s}$
 Thickness of oil film, $t = dy = 1.5 \text{ mm} = 1.5 \times 10^{-3} \text{ m}$

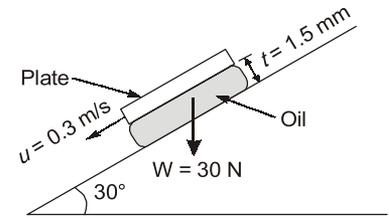

Let the viscosity of fluid between plate and inclined plane is μ .
 Component of weight W , along the plane = $W \cos 60^\circ = 300 \cos 60^\circ = 150 \text{ N}$
 Thus the shear force, F , on the bottom surface of the plate = 150 N

and shear stress,
$$\tau = \frac{F}{\text{Area}} = \frac{150}{0.64} \text{ N/m}^2$$

Now,
$$\tau = \mu \frac{du}{dy}$$

$du = \text{change of velocity} = u - 0 = 0.3 \text{ m/sec}$
 $dy = t = 1.5 \times 10^{-3} \text{ m}$


$\therefore \frac{150}{0.64} = \mu \times \frac{0.3}{1.5 \times 10^{-3}}$

$$\mu = \frac{150 \times 1.5 \times 10^{-3}}{0.64 \times 0.3} = 1.17 \text{ Ns/m}^2 = 11.7 \text{ Poise}$$

Q3 The dynamic viscosity of an oil, used for lubrication between a shaft and sleeve is 6 poise. The shaft is of diameter 0.4 m and rotates at 190 rpm. Calculate the power lost in the bearing for a sleeve length of 90 mm. The thickness of the oil film is 1.5 mm.

Solution:

Given:

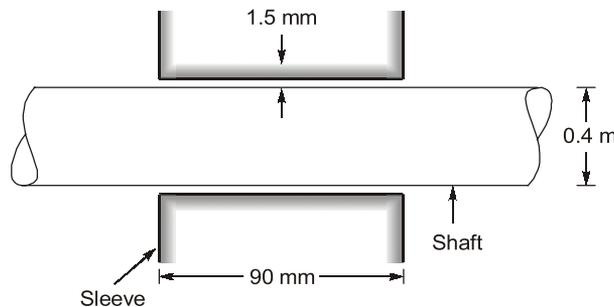

Viscosity, $\mu = 6 \text{ Poise}$

$$= \frac{6}{10} \frac{\text{Ns}}{\text{m}^2} = 0.6 \text{ Ns/m}^2$$

Dia. of shaft, $D = 0.4 \text{ m}$
 Speed of shaft, $N = 1900 \text{ rpm}$

Sleeve length, $L = 90 \text{ mm} = 90 \times 10^{-3} \text{ m}$
 Thickness of oil film, $t = 1.5 \text{ mm} = 1.5 \times 10^{-3} \text{ m}$

Tangential velocity of shaft,
$$u = \frac{\pi DN}{60}$$

$$= \frac{\pi \times 0.4 \times 190}{60} = 3.98 \text{ m/s}$$

Using the relation,
$$\tau = \mu \frac{du}{dy}$$

where, $du = \text{Change of velocity} = u - 0 = u = 3.98 \text{ m/s}$
 $dy = \text{Change of distance} = t = 1.5 \times 10^{-3} \text{ m}$

$$\tau = 10 \times \frac{3.98}{1.5 \times 10^{-3}} = 1592 \text{ N/m}^2$$

This is shear stress on shaft,

\therefore Shear force on the shaft,
$$F = \text{Shear stress} \times \text{Area}$$

$$= 1592 \times \pi D \times L = 1592 \times \pi \times 0.4 \times 90 \times 10^{-3} = 180.05 \text{ N}$$

Torque on the shaft,
$$T = \text{Force} \times \frac{D}{2}$$

$$= 180.5 \times \frac{0.4}{2} = 36.01 \text{ Nm}$$

\therefore
$$\text{Power lost} = \frac{2\pi NT}{60}$$

$$= \frac{2\pi \times 190 \times 36.01}{60} = 716.48 \text{ W}$$

Q4 A vertical gap 23.5 mm wide of infinite extent contains oil of specific gravity 0.9 and viscosity 2.5 N-s/m². A metal plate 1.5 m × 1.5 m × 1.5 mm weighing 50 N is to be lifted through the gap at a constant speed of 0.1 m/sec. Estimate the force required to lift the plate.

Solution:

Given: Width of gap = 23.5 mm
 Viscosity, $\mu = 2.5 \text{ Ns/m}^2$
 Specific gravity oil = 0.9

\therefore Weight density of oil = $0.9 \times 1000 = 900 \text{ kgf/m}^3$
 $= 900 \times 9.81 \text{ N/m}^3$


($\because 1 \text{ kgf} = 9.81 \text{ N}$)

Assuming that the plate lies in the middle of the gap

Volume of plate = $1.5 \text{ m} \times 1.5 \text{ m} \times 1.5 \text{ mm}$
 $= 1.5 \times 1.5 \times 0.0015 \text{ m}^3$
 $= 0.003375 \text{ m}^3$

Thickness of plate = 1.5 mm
 Velocity of plate = 0.1 m/sec
 Weight of plate = 50 N

When the plate is in the middle of the gap, the distance of plate from

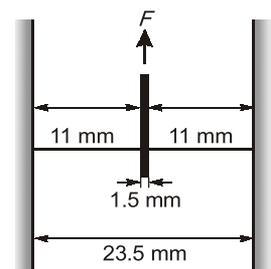

$$\text{Vertical surface of the gap} = \left(\frac{\text{Width of gap} - \text{Thickness of plate}}{2} \right)$$

$$= \left(\frac{23.5 - 1.5}{2} \right) = 11 \text{ mm} = 0.011 \text{ m}$$

Now, shear force on left side of the metallic plate

$$F_1 = \text{Shear stress} \times \text{Area}$$

$$= \mu \left(\frac{du}{dy} \right)_1 \times (1.5 \times 1.5) = 2.5 \times \left(\frac{0.1}{0.011} \right) \times 1.5 \times 1.5 = 51.136 \text{ N}$$

Similarly, the shear force on the right side of the metallic plate

$$F_2 = \text{Shear stress} \times \text{Area}$$

$$= 2.5 \times \left(\frac{0.1}{0.011} \right) \times (1.5 \times 1.5) = 51.136 \text{ N}$$

∴ **Total shear force**

$$= F_1 + F_2 = 51.136 + 51.136 = 102.272 \text{ N}$$

In this case the weight of plate (which is acting downward) and upward thrust is also to be taken into account.

$$\begin{aligned} \therefore \text{The upward thrust} &= \text{weight of fluid displaced} = \rho v g \\ &= (\text{unit weight of fluid}) \times \text{Volume of fluid displaced} \\ &= 9.81 \times 900 \times 0.003375 \\ &= 29.80 \text{ N} \end{aligned}$$

$$\begin{aligned} \text{The net force acting in the downward direction due to the weight of the plate and upward thrust} \\ &= \text{weight of plate} - \text{upward thrust} = 50 - 29.80 = 20.20 \text{ N} \end{aligned}$$

∴ Total force required to lift the plate up

$$= \text{Total shear force} + 20.20 = 102.272 + 20.20 = 122.472 \text{ N}$$

Q5 The pressure outside the droplet of water of diameter 0.04 mm is 10.32 N/cm² (atmospheric pressure). Calculate the pressure within the droplet if surface tension is given as 0.0725 N/m of water.

Solution:

Given, dia. of droplet, $d = 0.04 \text{ mm} = 0.04 \times 10^{-3} \text{ m}$

Pressure outside the droplet = 10.32 N/cm² = 10.32 × 10⁴ N/m²

Surface tension, $\sigma = 0.0725 \text{ N/m}$

The **pressure inside the droplet**, in excess of outside pressure is given by

$$p = \frac{4\sigma}{d}$$

$$= \frac{4 \times 0.0725}{0.04 \times 10^{-3}} = 7250 \text{ N/m}^2$$

$$= \frac{7250 \text{ N}}{10^4 \text{ cm}^2} = 0.725 \text{ N/cm}^2$$

$$\begin{aligned} \text{Pressure inside the droplet} &= p + \text{pressure outside the droplet} \\ &= 0.725 + 10.32 = 11.045 \text{ N/cm}^2 \end{aligned}$$