


# **COMPUTER SCIENCE & IT**



**POSTAL  
BOOK PACKAGE  
2024**

**OBJECTIVE  
PRACTICE SETS**

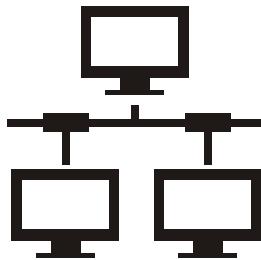

**MADE EASY**  
Publications

[www.madeeasypublications.org](http://www.madeeasypublications.org)

# **POSTAL BOOK PACKAGE**

# **2024**

# **CONTENTS**

---

## **COMPUTER SCIENCE & IT**

### **Computer Networks**

1.	Networking Fundamentals and Physical Layer .....	3
2.	Data Link Layer .....	24
3.	Network Layer.....	54
4.	Transport Layer .....	78
5.	Application Layer .....	95

Note: This book contains copyright subject matter to MADE EASY Publications, New Delhi. No part of this book may be reproduced, stored in a retrieval system or transmitted in any form or by any means. Violators are liable to be legally prosecuted.

# 1

---

CHAPTER

# Networking Fundamentals and Physical Layer

## Multiple Choice Questions & NAT Questions

1. Computer networks is
  - (a) Collection of hardware components and computers
  - (b) Interconnected by communication channels
  - (c) Sharing of resources and information
  - (d) All of the above
2. Protocols are
  - (a) Agreements on how communication components and DTE's are to communicate.
  - (b) Logical communication channels used for transferring data.
  - (c) Physical communication channels used for transferring data.
  - (d) None of the above
3. Match the following groups based on layer of OSI model.

Group-1	Group-2
A. Hub	1. Physical layer
B. Bridge	2. Data link layer
C. Router	3. Network layer
D. Server	4. Application layer

Codes:

A	B	C	D
(a) 1 2 3 4			
(b) 2 2 3 3			
(c) 2 3 3 3			
(d) 1 3 3 4			

4. Match the following groups:

Group-1	Group-2
A. Link	1. Message
B. Network	2. Segment
C. Application	3. Datagram
D. Transport	4. Frame

Codes:

A	B	C	D
(a) 3 4 2 1			
(b) 4 3 2 1			
(c) 4 3 1 2			
(d) 3 4 1 2			

5. Match **List-I** with **List-II** and select the correct answer using the codes given below the lists:

**List-I**

- A. Session layer
- B. Transport layer
- C. Application layer
- D. MDI (Medium Dependent Interface)

**List-II**

1. Connects DCE into physical channel.
2. Provides end to end connectivity.
3. Provides organized means to exchange data between users. (Like synchronization points).
4. Supports an end user process and performs required file transfer.

Codes:

A	B	C	D
(a) 3 4 2 1			
(b) 3 2 4 1			
(c) 2 4 1 3			
(d) 4 3 2 1			

6. Match the following:

**List-I**

- A. Data link layer
- B. Physical layer
- C. Presentation layer
- D. Network layer

**List-II**

1. The lowest layer whose function is to activate, deactivate and maintain the circuit between DTE and DCE.
2. Performs routing and communication.
3. Detection and recovery from errors in the transmitted data.
4. Concerned with for the syntax of the data.

Codes:

A	B	C	D
(a) 3 1 4 2			
(b) 2 1 4 3			
(c) 4 1 2 3			
(d) 2 1 3 4			

7. Which of the following OSI level is more closely related to the physical communications facilities?
- Application
  - Session
  - Network
  - Data link
8. Which of the following connectivity devices typically work at the physical layer of the OSI model?
- Routers
  - Bridges
  - Repeaters
  - Gateways
9. The method of communication in which transmission takes place in both directions, but only in one direction at a time is called
- Simplex
  - Four wire circuit
  - Full duplex
  - Half duplex
10. In a broad sense, a railway track is an example of
- Simplex
  - Half-duplex
  - Full-duplex
  - All of these
11. Which of the following is not true?
- Ring topology of N-devices contains  $(N - 1)$  dropline and N-Ring cables.
  - Bus topology of N-devices needs 1 dropline and N-Backbone cables.
  - Star topology of N-devices contains  $N + 1$  links and N-ports.
  - All of these
12. A network that requires human intervention to route signals is called a
- Bus network
  - Ring network
  - Star network
  - T-switched network
13. Match the following cables with their bandwidth
- | List-I           | List-II             |
|------------------|---------------------|
| I. Coaxial cable | A. 4 Mbps to 1 Gbps |
| II. UTP          | B. 10 Gbps          |
| III. STP         | C. 10 Mbps          |
| IV. Fiber optic  | D. 10 to 100 Mbps   |
- I - B, II - D, III - A, IV - C
  - I - C, II - A, III - D, IV - B
  - I - C, II - D, III - B, IV - C
  - I - B, II - A, III - D, IV - B
14. Baseband is
- Transmission of signals without modulation.
  - A signal all of whose energy is contained within a finite frequency range is finite but near to zero.
15. Broad band uses
- Manchester encoding
  - FSK encoding
  - ASK encoding
  - PSK encoding
16. Baud means the
- Number of bits transferred per unit time
  - Number of bytes transmitted per unit time
  - Rate at which the signal changes
  - None of these
17. The effective bandwidth is based on \_\_\_\_\_.
- Average data rate
  - Peak data rate
  - Maximum burst size
  - All of the above
18. Choose the correct statement(s):
- Baseband network uses analog technology.
  - Baseband network is Time Division Multiplexed.
  - Broadband network uses digital technology.
  - In broadband network, the carrier signals operate at lower frequency.
19. A device that can convert digital signals to analog signals is (only in networking)
- An emulator
  - A packet
  - A modem
  - None of these
20. When a signal travels through a transmission medium, its power becomes 100 times. Then there power would be
- Loss of 100
  - Loss of 20 dB
  - Gain of 100
  - Gain of 20 dB
21. There are three IP addresses as given below:
- $$X = 202.23.14.150$$
- $$Y = 168.19.200.12$$
- $$Z = 72.192.52.210$$
- Which of the following statements is/are correct?
- X is Class A, Y is Class B and Z is Class C
  - X is Class C, Y is Class A and Z is Class B
  - X is Class C, Y is Class B and Z is Class A
  - X is Class A, Y is Class C and Z is Class B



- 39.** A subnet mask in class B has 22 one's. How many subnets does it define?
- 16
  - 32
  - 68
  - 64
- 40.** For a class C network if IP address of a computer is 200.99.39.112 and subnet mask is 255.255.255.224 the decimal value of last octet of last host of sixth subnet is \_\_\_\_\_.
- 41.** Consider the following IP address:
- (i) 210.15.16.191
  - (ii) 210.15.16.127
  - (iii) 210.15.16.94
  - (d) 210.15.16.62
- Which of the following IP address may represent last host of any subnet if subnet mask is 255.255.255.224?
- (iii) and (iv)
  - (ii) and (iv)
  - (i) and (iii)
  - (i) and (ii)
- 42.** The subnet mask for particular network is 255.255.28.0. Which of the following pairs of IP addresses could belong to this network. Also, the maximum number of host that can belong to this subnet.
- 191.203.31.87 and 191.234.31.88; 1024
  - 191.203.30.85 and 191.203.31.87; 1022
  - 172.57.88.62 and 172.86.87.232; 198
  - 10.35.38.2 and 10.35.39.4; 1024
- 43.** In CIDR, if IP address is used 192.60.128.0/22. Then find the net mask?
- 255.255.255.0
  - 255.255.252.0
  - 255.255.255.128
  - 255.255.128.0
- 44.** Consider the OSI standard for LANs,
- The OSI network layer is subdivided into a MAC layer and a LLC layer.
  - The OSI data link layer is subdivided into an Ethernet layer and a Token ring layer.
  - The OSI data link layer is subdivided into a MAC layer a LLC layer.
  - The OSI physical layer is subdivided in to an Ethernet layer and a Token Ring layer.
- 45.** The frequency range at which the LAN coaxial cables will be used is
- $10^{10}$  to  $10^{11}$  Hz
  - $10^{14}$  to  $10^5$  Hz
  - $10^6$  to  $10^8$  Hz
  - $10^3$  to  $10^4$  Hz
- 46.** To prevent signal alternation, what is the max number of repeaters that can be placed on one 10 Base 5 or 10 Base 2 network?
- Four
  - Five
  - Three
  - Any number
- 47.** Considered the following router with three sub networks
- 
- Suppose if above network uses class C network 192.203.16.0 then find the subnet mask used for the department Y. [Assume all are in the same network].
- 255.255.255.0
  - 255.255.255.128
  - 255.255.255.192
  - 255.255.255.255
- 48.** A Network that is 172.28.0.0 and would like to support 650 hosts per subnet. The subnet mask should we use is 255.255. \_\_\_\_ and \_\_\_\_?
- 49.** The subnet mask for a particular network is 255.255.31.0 Which of the following pairs of IP addresses could belong to this network?
- 172.57.88.62 and 172.56.87.23.2
  - 10.35.28.2 and 10.35.29.4
  - 191.203.31.87 and 191.234.31.88
  - 128.8.129.43 and 128.8.161.55
- 50.** A class B network address 130.50.0.0 is submitted as follows. The last 10 bits of the host id are allotted for host number and the remaining 6 bits are reserved for subnet number.  
How many subnets and number of hosts in each subnet are possible with the above addressing scheme?
- 62, 1022
  - 30, 510
  - 14, 254
  - None of these
- 51.** In the above question, what are the starting addresses of 1<sup>st</sup> and 4<sup>th</sup> subnets?
- 130.50.4.1 and 130.50.16.1
  - 130.50.1.1 and 130.50.4.1
  - 130.50.0.0 and 130.50.3.0
  - None of these

**Answers****Networking Fundamentals and Physical Layer**

1. (d)    2. (a)    3. (a)    4. (c)    5. (b)    6. (a)    7. (d)    8. (c)    9. (d)  
 10. (b)    11. (d)    12. (d)    13. (b)    14. (a)    15. (d)    16. (c)    17. (d)    18. (b)  
 19. (b)    20. (d)    21. (c)    22. (b)    23. (b)    24. (c)    25. (c)    26. (b)    27. (c)  
 28. (b)    29. (d)    30. (a)    31. (c)    32. (255)    33. (c)    34. (d)    35. (b)    36. (b)  
 37. (d)    38. (b)    39. (d)    40. (222)    41. (a)    42. (b)    43. (b)    44. (c)    45. (c)  
 46. (a)    47. (b)    48. (252 and 0)    49. (d)    50. (a)    51. (a)    52. (c)    53. (d)  
 54. (c)    55. (c)    56. (c)    57. (c)    58. (d)    59. (d)    60. (b)    61. (16)    62. (39.8)  
 63. (a)    64. (c)    65. (c)    66. (d)    67. (c)    68. (a)    69. (c)    70. (b)    71. (b)  
 72. (b)    73. (c)    74. (a)    75. (33)    76. (c)    77. (c)    78. (b)    79. (a)    80. (1)  
 81. (2)    82. (b)    83. (a)    84. (14)    85. (d)    86. (c)    87. (62)    88. (c)    89. (d)  
 90. (c)    91. (a)    92. (64)    93. (a)    94. (c)    95. (d)    96. (b)    97. (a)    98. (a)  
 99. (d)    100. (320)    101. (111)    102. (a, b, c, d)    103. (b, c)    104. (a, c)    105. (b, c)    106. (a, b)  
 107. (a, b)    108. (a, c, d)    109. (a, b, d)    110. (a, b)    111. (c, d)    112. (b, c)

**Explanations****Networking Fundamentals and Physical Layer****2. (a)**

Protocols is a set of rules. It is an agreement between the communicating parties on how communication should proceed.

**3. (a)**

Hub works in physical layer  
 Bridge works in data link layer  
 Router works in network layer  
 PC, Server works in application layer.

**4. (c)**

Link layer unit of data is frame  
 Network layer unit of data is datagram  
 Application layer unit of data is message  
 Transport layer unit of data is segment

**Note:** Network layer can use the term packet if communication is reliable (via TCP).

**5. (b)**

- Session layer provide organised means to exchange data between users.
- Layer support an end user process and performs required file transfer.
- Transport layer provides end to end connectivity.
- Medium dependent interface connects DCE into physical channel.

**6. (a)**

**Data link layer:** It is associated with the detection and recovery from the errors in the transmitted data.

**Physical layer:** It is the lowest layer whose function is to activate, deactivate and maintain the circuit between Data Terminal Equipment (DTE).

**Presentation layer:** It is concerned with the syntax and semantics of the information exchanged between two systems.

**Network layer:** This layer has some specific responsibilities:

- (i) Logical addressing [communication]
- (ii) Routing

**7. (d)**

OSI model layer division is as application layer, session layer, transport layer, network layer, data-link layer, physical layer. Hence the ISO level which is more closely related to the physical communication facilities is data link layer among other given layers.

**8. (c)**

Router — network layer  
 Bridges — data link layer

Repeater — physical layer  
Gateways — application layer

**9. (d)**

In simplex mode, transmission takes place in one direction.

In duplex mode, transmission take place simultaneously in both direction.


In half-duplex transmission take place in both direction but not at the same time.

**10. (b)**

In half duplex mode the transmission is takes place in both direction, but only in one direction at a time.

Hence, railway track is an example of this half-duplex mode.

**11. (d)**

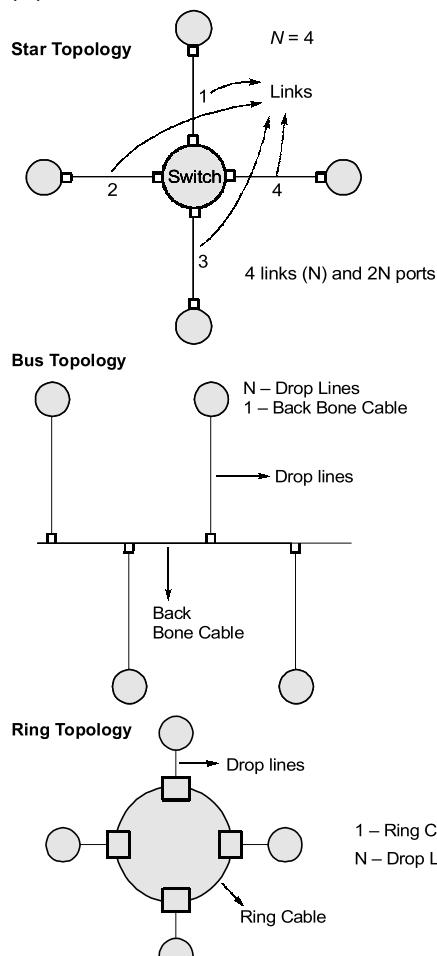

**12. (d)**

T-switched network requires human intervention to route signals.

**13. (b)**

Coaxial : 10 Mbps  
UTP : 4 Mbps to 1 Gbps  
STP : 10 to 100 Gbps  
Fiber optic : 10 Gbps

**14. (a)**

Baseband is a signal that has a very narrow and near zero frequency range. Baseband can be synonymous with low pass or non-modulated. In broadband simultaneous transmission of data to a number of stations possible but not in baseband.

**15. (d)**

Broad band uses phase shift key encoding technique.

**16. (c)**

Baud rate is the number of signal units per second that are required to represent the bits transmitted during one second.

**17. (d)**

The effective data burst is a measure of average data rate, peak data rate and maximum data rate.

**18. (b)**

Baseband transmission typically use digital signalling over a single wire. Using this, it is possible to transmit multiple signals on a single cable by time-division multiplexing. In broadband transmission multiple channels are created using frequency-division multiplexing.

**19. (b)**

Modem stands for modulator/demodulator. Modulator converts a digital signal into an analog signal using ASK, FSK, PSK or QAM. Demodulator converts an analog signal into digital signal.

**20. (d)**

$$\text{Formulated at amplification} = 10 \log_{10} \frac{P_2}{P_1} \text{ dB}$$

$$\text{Here, } P_2 = 100 P_1$$

$$\therefore \text{Amplification} = 10 \log_{10} \frac{100P_1}{P_1} \text{ dB}$$

$$= 10 \log_{10} 10^2 = 20 \text{ dB}$$

Here, value is +ve. Hence gain at 20 dB